




## Manifold Bolted Ball Valves

### STANDARD FEATURES:

- FKM (viton type) seals
- PTFE self-lubricating stem bushings and seats cannot stick or bind
- Precision molded in polypropylene. Polypropylene is reinforced with fiberglass for additional strength
- Self-aligning ball moves freely against the PTFE seats for smooth operation. The valve opens and closes with very little pressure on the handle
- Ball is diamond turned, after molding, to make it spherically perfect, which provides precise contact between ball and seats.

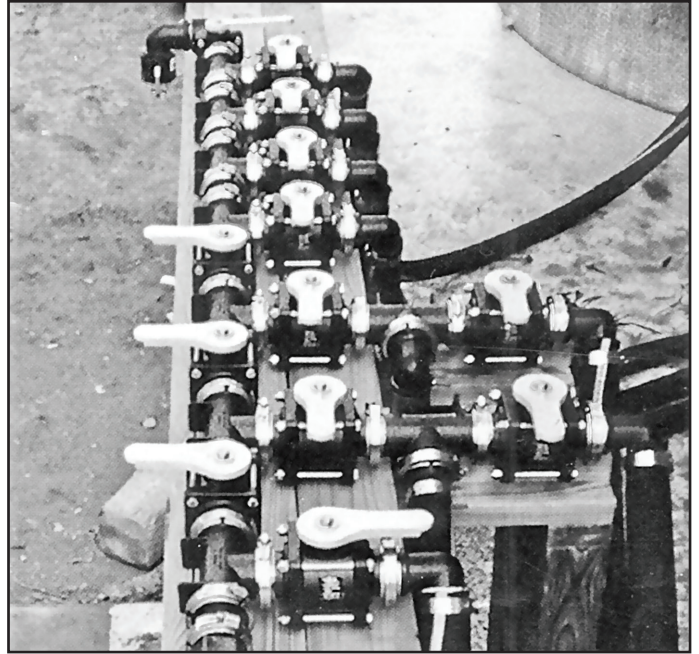

## Manifold Bolted Ball Valves

DESCRIPTION	Parts #
1" x 1" Flange ball valve	BAMV100CF
2" x 2" Flange ball valve	BAMV200CF
2" x 2" Full port flange ball valve	BAMV220CF
3" x 3" Flange ball valve	BAMV300
3" x 3" Full port flange ball valve	BAMV300CF

## 6 Bolt Valves w/ "F" Adapter



DESCRIPTION	Parts #
2" Full port valve w/ F adapter	BAVFMT200FP



## 2 and 3" Standard Port Stubby Valves

DESCRIPTION	Parts #
2" Male adapter x 2" female NPT	BAVSF200
2" Male adapter x 2" male NPT	BAVSFMT200
3" Male adapter x 3" male NPT	BAVSFMT300
3" Male adapter full port x 3" male NPT	BAVSFMT300FP